

VEA...VRF series

A...VRF Series



Application

- For supply and exhaust ventilation, air conditioning and heating. mounting in false ceilings or walls

- Used for correct air circulation in properties.

Design



- Made of high quality plastic (ABS plastic)
- Special aerodynamic disc valve design ensures uniform air distribution.
- Smooth air pass regulation due to rotation of central part of the damper.
- Easy installation with fixing lugs and a mounting flange with a lock ring.
- The internal part has a sealing ring for a tighter fit.

- Equipped with a mounting flange and lock ring for easy connection to round air ducts
- Mounting flange is fixed to false ceiling with screws.
- Lock ring provides easy fixing of the flexible air duct on the mounting flange.




Overall dimensions


Code	Dimensions					Air pass, m ²	Damper normal pitch, mm
	D	D1	D2	H	H1		
VEA100VRF	100	90	148	58	28	0-0.006	0-20
VEA125VRF	125	110	166	58	20	0-0.008	0-22
VEA150VRF	150	128	200	58	20	0-0.009	0-23




A 100 VRF

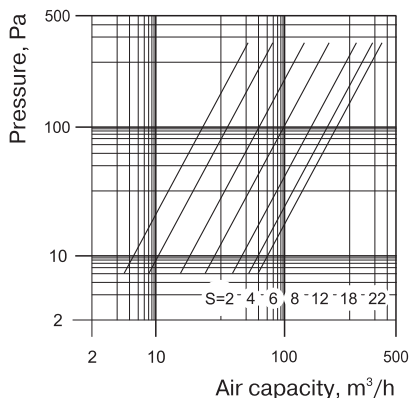

A 125 VRF

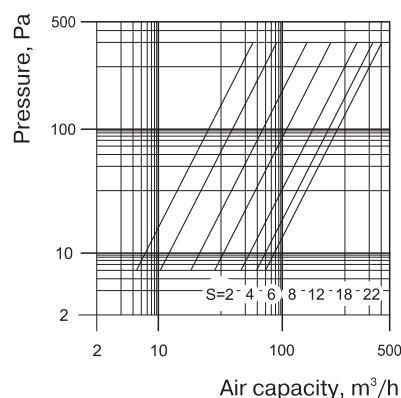

A 150 VRF

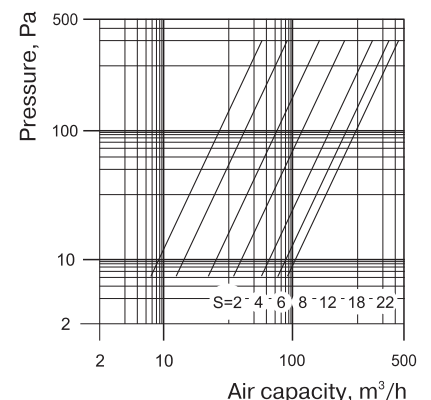

Due to a policy of continuous development, prices and specifications are subject to change without notice.

Christchurch

264 Annex Rd, PO Box 8358
Riccarton 03 343 6184

Wellington

18 Armidale St, (PO Box 8358, Chch)
Petone 04 566 7969

Auckland

6 Stanway Pl, PO Box 12-243
Penrose 09 579 3257

0800 SMOOTH (0800 766 684)

www.smooth-air.co.nz
sales@smooth-air.co.nz